
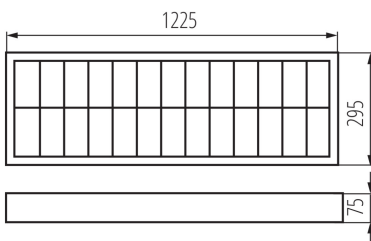


Ceiling louver fitting



Kanlux NOTUS are raster facade luminaires that can be mounted quickly and easily. Raster lighting is still a very popular solution for office and industrial spaces. It is all due to good lighting parameters at a good price, simple construction and durability of the materials of which they are made.

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: cold

Replaceable light source: yes

Light source included: no

Length [mm]: 1225

Width [mm]: 295

Height [mm]: 75

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: 2 x 36

Class of protection against electric shock: I

Light source: T8

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 20

ADDITIONAL INFORMATION:


- half-parabolic reflector / V-shaped grille cross-bars
- fluorescent lamp sockets concealed with a reflector
- light fixtures designed for hanging on slings
- Class A2 TRIDONIC ballast
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, powder coating

Ceiling louver fitting



KANLUX S.A. (kat 19732) NOTUS 3 EVG 236 NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 19732) NOTUS 3 EVG 236 NT
Lampy: 2 x T26 36W/827

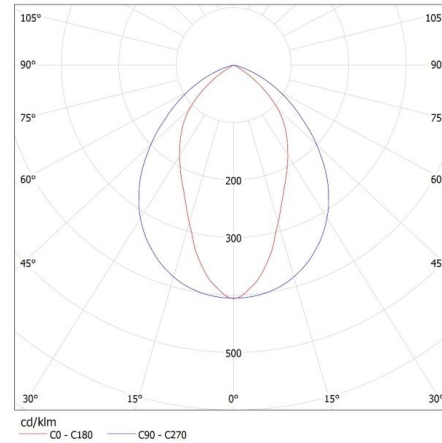

ACCESSORIES:

07870 ROPE-NT 150

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set



07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

