STAR COMPLET

BOXES WITH INDUSTRIAL SOCKETS

Description: SURFACE BOX 1x12 MOD. (TW). WITH POWER SOCKETS AND PROTECTIONS

Reference:
SV12302/P

Characteristics:

Product type:	Boxes with assembled and wired power sockets and protections
Exterior dimensions (Height x Width x Depth):	436x310x210 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	1x12 DIN rail
Installation:	Surface
Color:	RAL 7035
Window:	Transparent
Weight (kg):	5,9
Cable entry:	Top: 8xM20 - 2xM25/32 - 1xM40 - Bottom: 4xM20 - 2xM25 - 2xM32 - 1xM40 - Oblong rear: 2xOB 25/32/25
Components:	4 IP54 sockets 2P+E 16A - 2 IP44 sockets 3P+E 32A. With protections. On the Ref. CSN12PT
Materials:	Halogen-free plastic materials. Frame and base: ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h.
Lid-window-door material:	Tinted PC, UV protection

Technical data:

Degree of protection:	IP44
Resistance to impact:	IK08
Glow wire resistance:	In the enclosure: 650 ºC. In power sockets: 960 ºC
Ball pressure test:	In the enclosure: 70 ºC. In power sockets: 125 ºC
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:

EAN:	8431044122342
Customs tariff number:	85.37.10.98

ETIM 8.0: EC000379

STAR COMPLET

BOXES WITH INDUSTRIAL SOCKETS

Description: SURFACE BOX 1x12 MOD. (TW). WITH POWER SOCKETS AND PROTECTIONS

Reference: SV12302/P

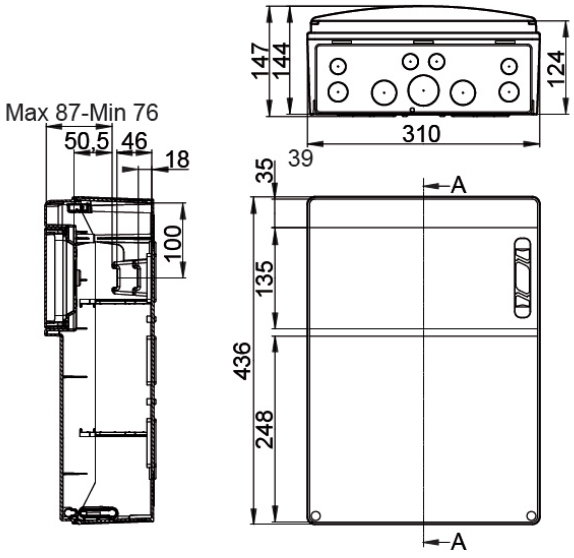

Singleline schematic:

httsp://www.ide.es/downloads/m.e.p./SV12302P.pdf

Exterior dimensions (Height x Width x Depth):

436x310x210 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

It is supplied completely assembled according to the specifications of each reference, protected with shrinkwrapped plastic and placed in multiple cardboard packaging, depending on the number of units ordered.

Packaging units: 1

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.